





Prismatic Keyboard  
**USER GUIDE**

## 【SPEC】 anidees 87 keys Keyboard

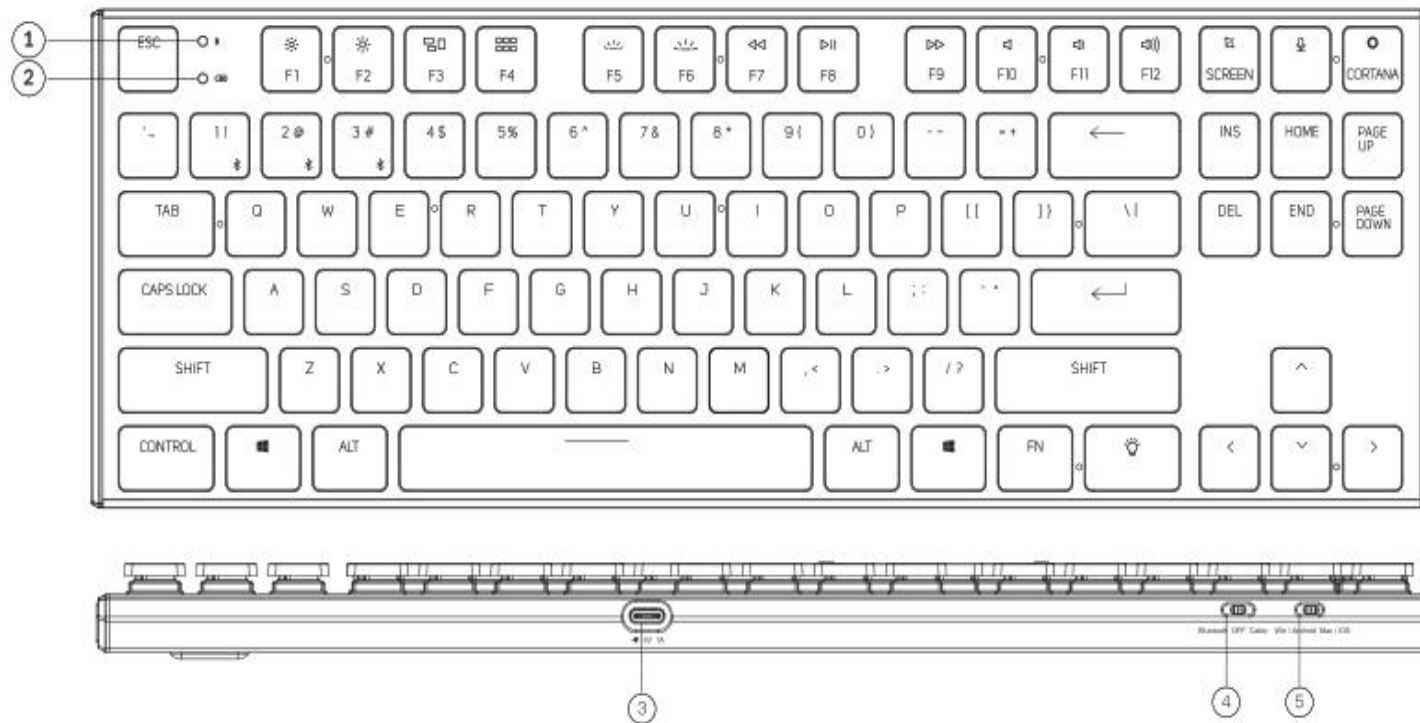


## 【SPEC】 anidees 87 keys Keyboard

### WINDOWS

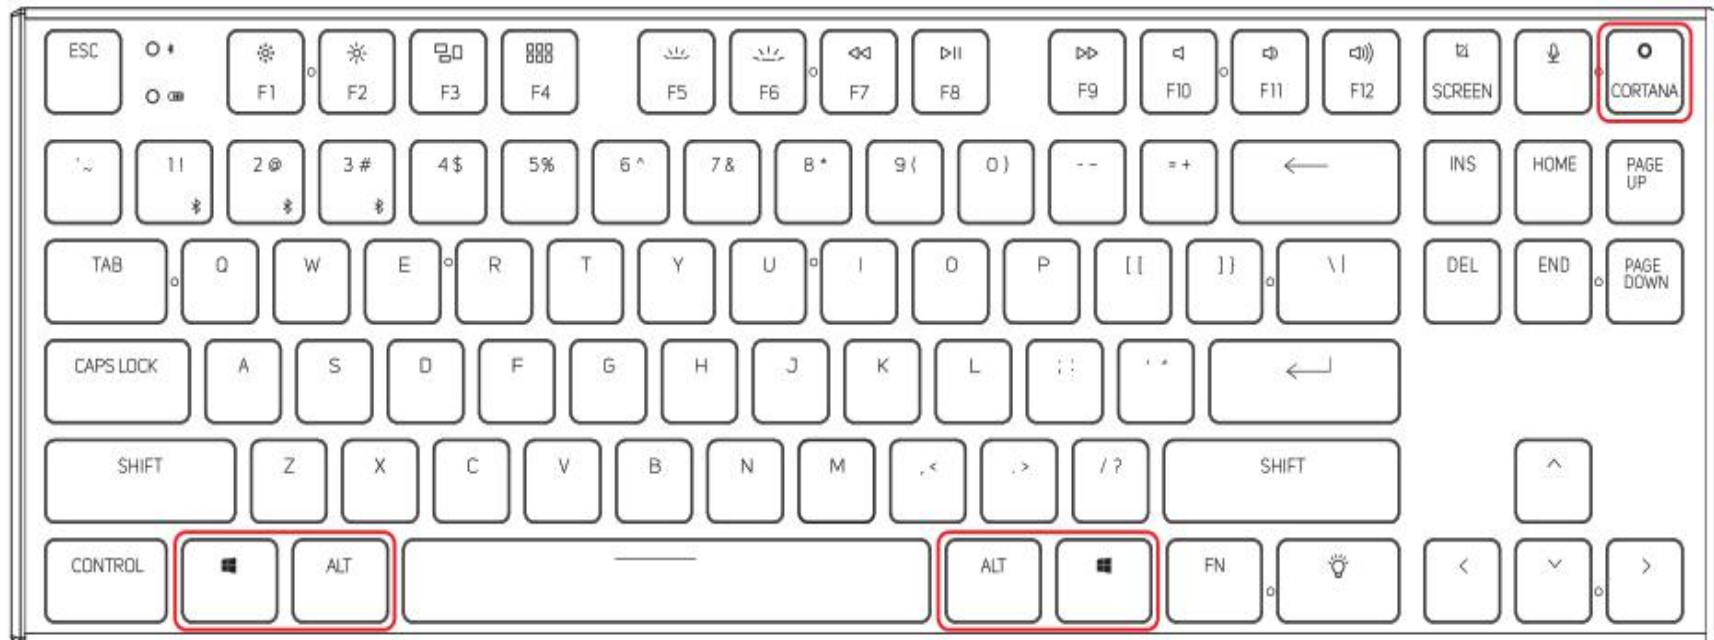

## 【SPEC】 anidees 87 keys Keyboard

MAC

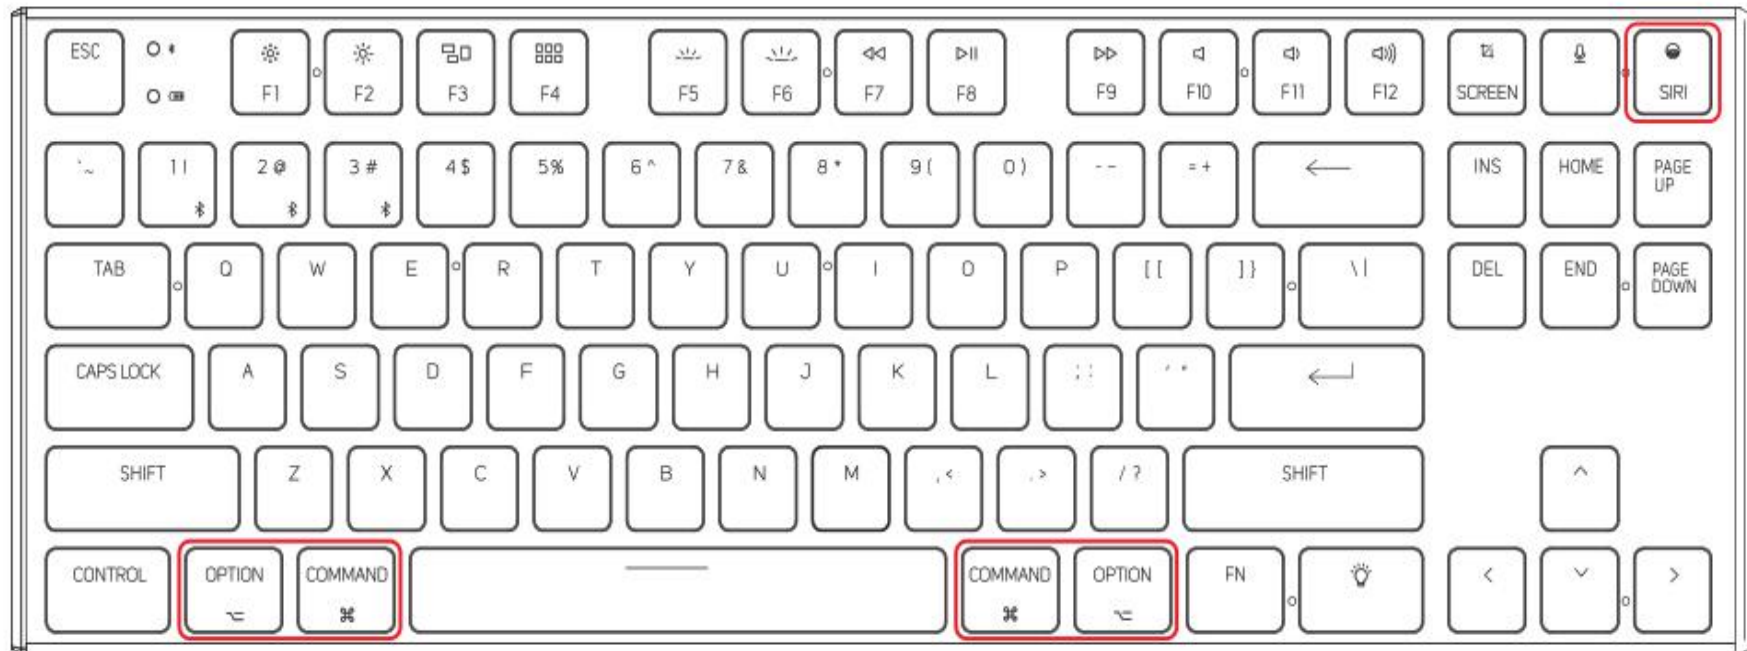

Number of Multimedia Keys: 12

Body material: aluminum alloy

Keycap Material: ABS

Backlit: RGB

Battery: 2,000mAh Li-ion Rechargeable Battery

Working Time: 2 - 4 weeks with lights off (varies with use case) / 8 - 40 hours with RGB lighting  
(varies with brightness levels and use case)

Charging Time: Around 2 hrs (USB 3.0)

Charging Port: USB Type-C

Mode: Bluetooth/Wired

Bluetooth Operating Distance: Within 10 meters (open space)


Bluetooth device name: anidees KB87

Size (87-Keys): 355\*120\*18mm/ 13.9 \* 4.7 \* 0.7inch

Weight: Around 650g/22.9 ounces

Operating Environment: -10 to 50°C


## 【SPEC】 anidees 104 keys Keyboard

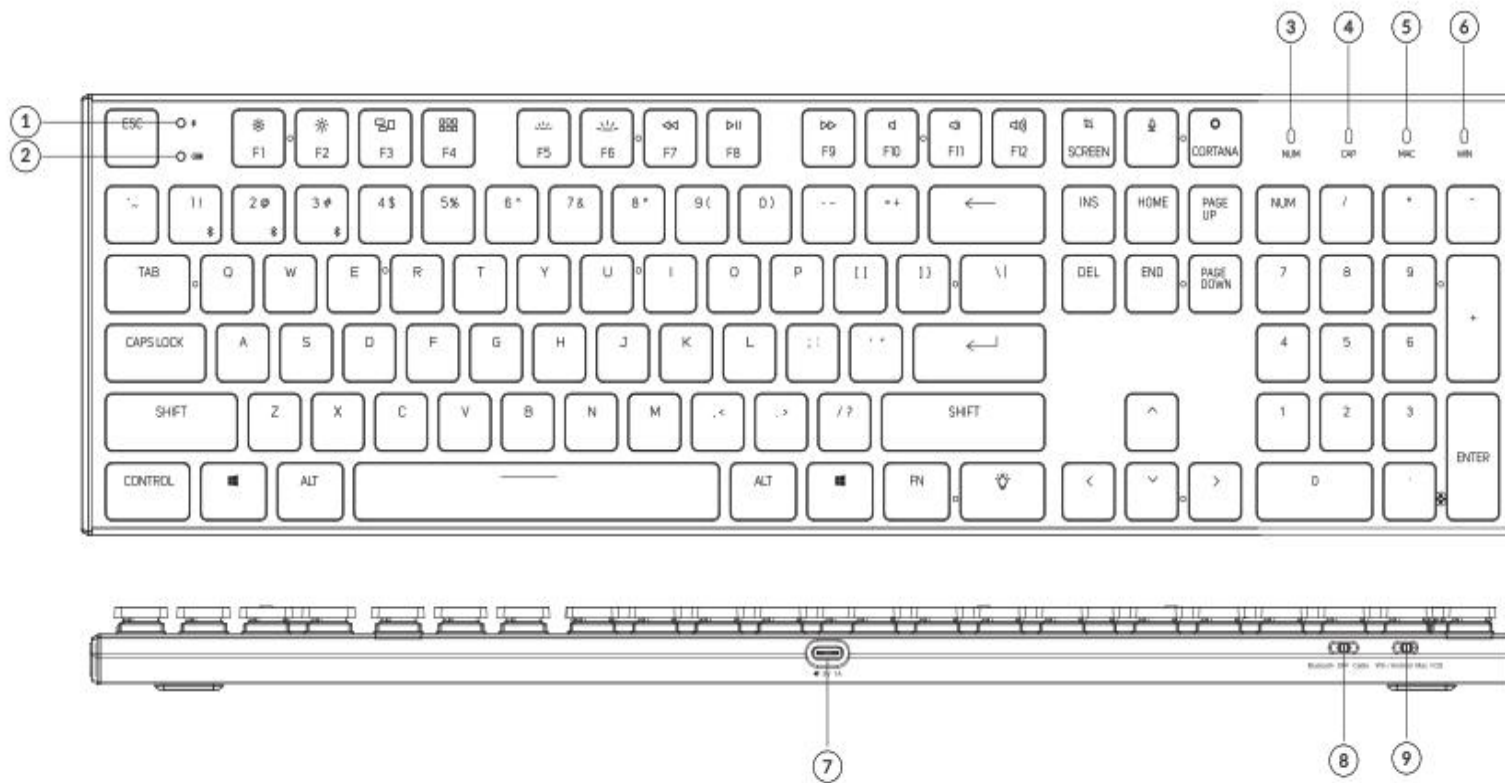

1. Bluetooth Indicator
2. Battery Indicator
3. Number Lock Indicator
4. Caps Lock Indicator
5. Mac OS Indicator
6. Windows OS Indicator
7. Type-C Port
8. Bluetooth OFF Cable  
(Mode Toggle Switch)
9. Win/Android Mac/iOS  
(OS Toggle Switch)


## 【SPEC】 anidees 104 keys Keyboard

### WINDOWS

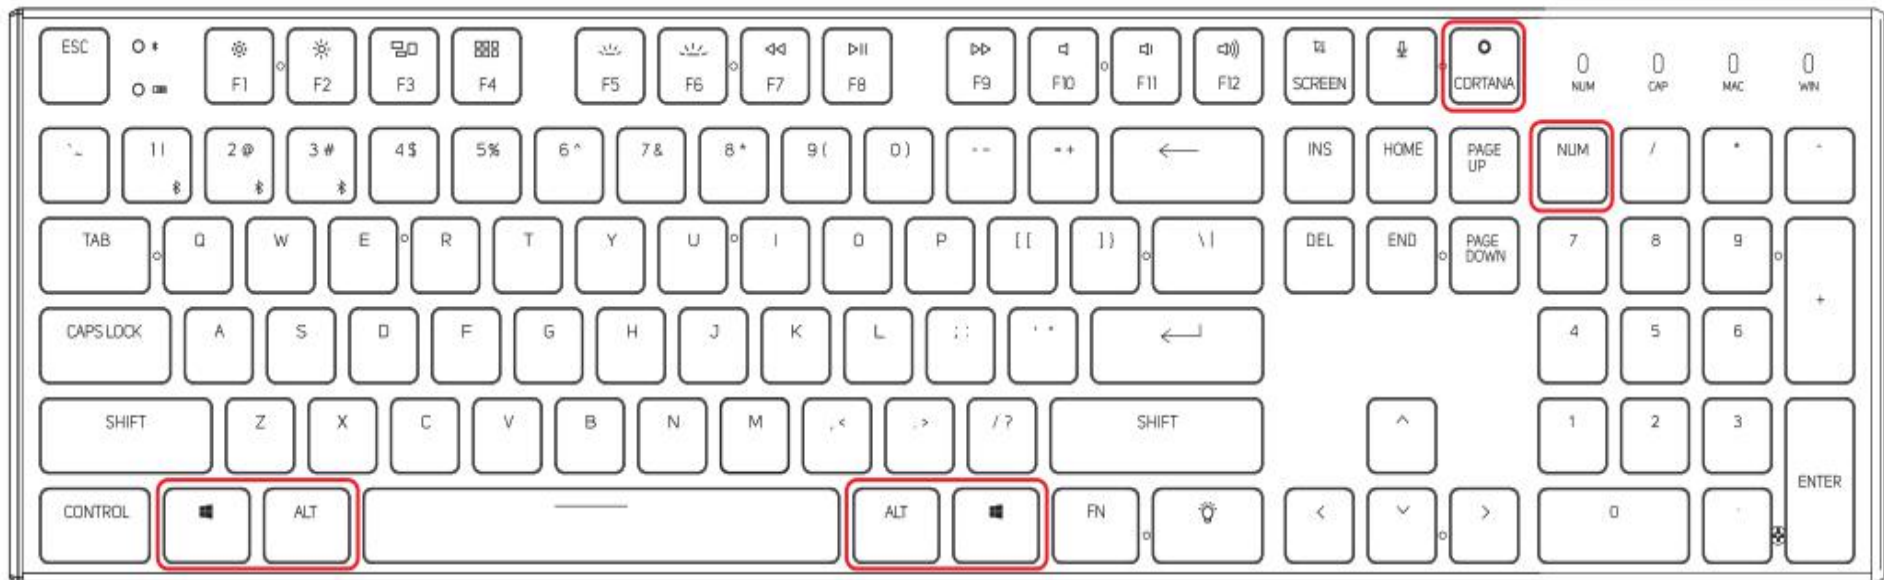

## 【SPEC】 anidees 104 keys Keyboard

MAC

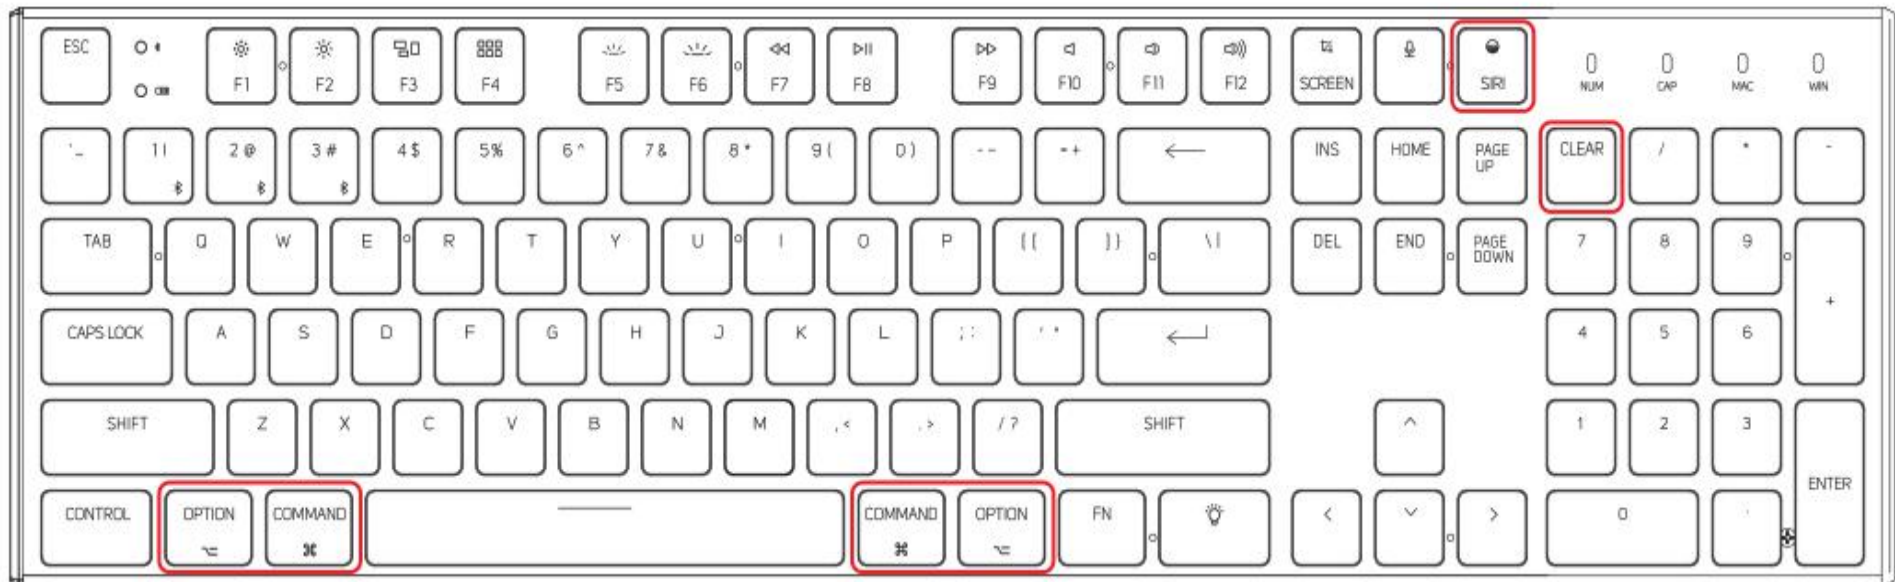



Number of multimedia keys: 12

Body material: aluminum alloy

Keycap material: ABS

Backlight: RGB

Battery: 2,000mAh lithium ion rechargeable battery

Working Time: 2 - 4 weeks with lights off (varies with use case) / 8 - 40 hours with RGB lighting  
(varies with brightness levels and use case)

Charging time: about 2 hours

Charging port: USB Type-C

Mode: Bluetooth / Wired

Bluetooth operating distance: up to 10 meters (open space)

Bluetooth device name: anidees KB104

Size (104-Keys): 435\*120\*18mm/ 17.1 \* 4.7 \* 0.7inch

Weight: Around 805g/28.4 ounces

Operating Environment: -10 to 50°C


## 【 CONTENT 】

1. anidees Mechanical Keyboard x 1
2. Type C cable x 1
3. Mac Keycaps ( 5 keycaps for AI-KB-PM87, 6 keycaps for AI-KB-PM104)
4. User Guide

## 【 CHARGE 】

1. Using the USB Type A / Type C to connect charger and keyboard.
  2. Battery Status / Indicator
    - Capacity < 15% => red indicator (flash)
    - Charging => red (static)
    - Full => green
- ◆ Please make sure to use 5V 1A adapter to charge the keyboard, we are not responsible for any problems caused by improper charging.
  - ◆ The keyboard can be charged under Bluetooth on / off.

## 【 WIRED MODE 】

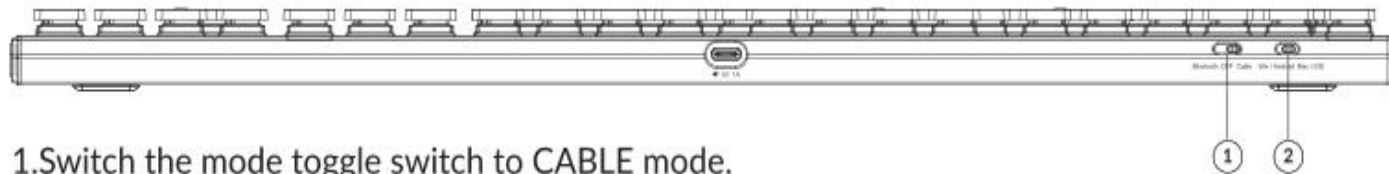

- 1.Switch the mode toggle switch to CABLE mode.
  - 2.Switch the OS toggle switch to your system ( Windows or Mac)
  - 3.Connecting the keyboard and PC / Mac by USB cable.
  - 4.RGB Backlit on. (19 modes)
- ◆Under wired mode, keyboard will NOT enter battery saver mode.

## 【 BLUETOOTH MODE 】



- 1.Switch the mode toggle switch to BLUETOOTH mode.
- 2.Switch the OS toggle switch to your system ( Windows or Mac)
- 3.RGB Backlit on

## Pairing your keyboard up to 3 devices

- ◆ Press and hold combined keys (as below) for 3 seconds to activate Bluetooth pairing. (Bluetooth indicator flash for 3 mins)
- ◆ Search the anidees KB on your device and connect it. (Bluetooth indicator goes off after successful pairing)

| Device                | 1   | 2   | 3   |
|-----------------------|---|---|---|
| Combined Keys to pair |  +  |  +  |  +  |

## Switch Bluetooth devices


Short press combination key to switch to different devices.

|                                    |   |   |   |
|------------------------------------|---|---|---|
| Switch different bluetooth devices |  +  |  +  |  +  |
|------------------------------------|---|---|---|

## 【 BLUETOOTH MODE 】

### Turn off the keyboard

1. Switch the mode toggle switch to OFF mode

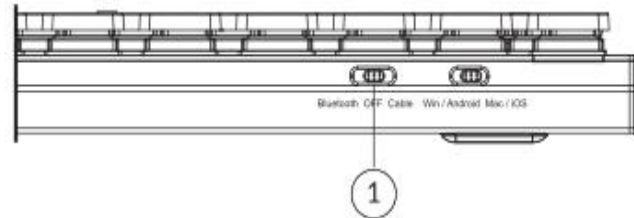

### Reconnect

1. Switch the mode toggle switch to BLUETOOTH mode.

2. The Bluetooth indicator flashes for 3 seconds and pairs with the last connected device.


3. If the keyboard enters battery saver mode and the Bluetooth indicator is off, press any key to enter the connection.


◆ The keyboard must have been paired with the device to perform this function.

### Battery Saver

Under Bluetooth mode, the keyboard backlight turns off when it is inactive after 10 mins, press any key to wake up.

## 【 BACKLIT SETTING 】


Press  to switch 19 modes

Press  +  or  to change light color.

## 【 OPERATION SYSTEM SWITCH 】

### MAC/iOS

Turn the switch to Mac/iOS when you are connected to a Mac or iOS operating system.  
To use multimedia keys, simply press F1 to F12.

*\*Under mac/iOS mode,  is used as 'clear', it cannot be used to lock the numeric keypad on the keyboard (only available for 104-key keyboards).*

### WINDOWS / ANDROID

Switch the toggle to Windows/Android when the keyboard is connected to a Windows or Android operating system. To use multimedia keys, simply press F1 to F12.

*\*When using the Windows/Android mode,   keys are used for "Windows" and "Alt" functions.*

## INPUT METHOD SWITCH

*For iOS:*

Input method switch:  +







Caps Lock:  (Enable General>Keyboards>Hardware Keyboard>Caps Lock Language Switch)

*For Android:*







Input method switch:  +

*NOTE: Functions of certain multimedia key may be disabled due to compatibility, versions, brands and drivers of Windows/Android OS. We also recommend not to switch OS frequently as it may impact keyboard operations.*







## 【 MULTIMEDIA FUNCTION 】

|         |  F1 |  F2 |  F3 |  F4 |  F5 |  F6 |
|---------|--|--|--|--|--|--|
| macOS   | Screen brightness -  | Screen brightness +  | Mission control  | Launchpad  | Backlit decrease   | Backlit increase   |
| iOS     | Screen brightness -  | Screen brightness +  | -  | -  | Backlit decrease   | Backlit increase   |
| Windows | Screen brightness -  | Screen brightness +  | -  | -  | Backlit decrease   | Backlit increase   |
| Android | -  | -  | -  | -  | Backlit decrease   | Backlit increase   |

|         |  F7 |  F8 |  F9 |  F10 |  F11 |  F12 |
|---------|--|--|--|---|---|---|
| macOS   | Previous track   | Play/Pause   | Next track   | Mute  | Volume down   | Volume up   |
| iOS     | Previous track   | Play/Pause   | Next track   | Mute  | Volume down   | Volume up   |
| Windows | Previous track   | Play/Pause   | Next track   | Mute  | Volume down   | Volume up   |
| Android | Previous track   | Play/Pause   | Next track   | Mute  | Volume down   | Volume up   |

|         |  INS |  DEL |  HOME |  END |  PAGE UP |  PAGE DOWN |
|---------|---|---|--|---|---|---|
| macOS   | Insert  | Delete  | Home   | End   | Scroll up   | Scroll down   |
| iOS     | Insert  | Delete  | Home   | End   | Scroll up   | Scroll down   |
| Windows | Insert  | Delete  | Home   | End   | Scroll up   | Scroll down   |
| Android | -   | -   | -  | -   | -   | -   |



|         |  |  |   |
|---------|---|--|---|
| macOS   | Capture screen  | Activate Dictation [1]   | Activate Siri [2]   |
| iOS     | -   | -  | -   |
| Windows | Capture screen  | Activate Dictation [3]   | Activate Cortana [4]  |
| Android | -   | -  | -   |

- [1] You need to activate Mac Dictation function on macOS (Apple Icon>System Preferences>Keyboard>Dictation>Shortcut), and set the shortcut by pressing FN (Function) key twice.
- [2] You need to activate Siri function on macOS (Apple Icon>System Preferences>Siri>Keyboard Shortcut), and set the keyboard shortcut by pressing FN (Function) + Space key at the same time.
- [3] You need to activate Windows Dictation on Windows OS, and set the shortcut by pressing Windows + H key. (Only supports US English and connects to internet)
- [4] You need to activate Cortana on Windows OS, and set the shortcut by pressing Windows + C key at the same time. (This shortcut is turned off by default on Windows, to turn it on, select Start>Settings>Cortana)

\*Windows Cortana and Windows Dictation only available for Windows 10 or above OS. Cortana is available only in certain countries/regions, and some Cortana features might not be available everywhere.

## 【 TROUBLESHOOTING 】

### **TROUBLESHOOTING**

If unable to pair keyboard to device, confirm that the device you're trying to pair with is Bluetooth-capable. If so, restart the device and try pairing it with the keyboard again.

Note: On a Windows computer, a new Bluetooth connection will sometimes require additional software updates—a process that may still be ongoing after a message appears indicating a successful completion. Wait at least 20 minutes after pairing to make sure all updates are completed before restarting the computer.

Confirm that the device is configured to accept Bluetooth connections (Windows) and supports an external keyboard (HID profile).

Go to Bluetooth Devices > Open Settings and select the following:

Allow Bluetooth devices to find this computer

Allow Bluetooth devices to connect to this computer

Alert me when a Bluetooth device wants to connect

### **My keyboard isn't working.**

For the keyboard: Turn the keyboard off and back on.

Turn Bluetooth off and restart the computer. (Windows)

For the device:

Go to Bluetooth settings and turn off Bluetooth and "forget" the keyboard.

Restart the device and turn on Bluetooth to reconnect.

### **Bluetooth connection is interrupted even within 10 meter.**

Check if the keyboard is resting on a metal surface that can interfere with the Bluetooth signal.

### **Third party input tools are not compatible with the keyboard.**

Due to compatibility, versions, brands and drivers of Windows/Android OS, functions of third party input tools may be affected while using the keyboard. Please make sure your operating system and drivers are up to date.

### **Certain fn keys or multimedia keys does not work under Windows/Android mode.**

Functions of certain multimedia keys may be disabled due to compatibility, versions, brands and drivers of Windows/Android OS.



Official website : [www.anidees.com](http://www.anidees.com)  
E-mail : [info@anidees.com](mailto:info@anidees.com)